

Overview

The remote microphone panel is a supervised remote microphone, used with the Audio Source Unit's (3-ASU) remote microphone input. The remote microphone panel is available in two packages. The 3-REMICA is designed to mount in two spaces of a 3-ANN series annunciator enclosure. Model 3-REMICP mounts in a CAB series enclosure on a 3-CHASS4 rail assembly. Both panels include a dynamic push-to-talk microphone and operator interface panel.

Each microphone panel has two external audio inputs. Using the external inputs, up to 63 microphone panels can be connected to a single 3-ASU. The first panel to initiate a page seizes control of the remote 3-ASU input and automatically prevents the other remote panels from issuing a page while the first unit is in use. The built-in 3-ASU microphone has a higher priority than any remote microphone, and will override a remote page.

The front panel provides Local Page Active, Remote Page Active, and Trouble LED indicators as well as an integral VU (Volume Unit) meter to indicate page volume level.

All panels utilize a 24 Vdc power source. Provisions are made for redundant power supplies. All wiring is supervised. A form C trouble contact is provided for use with a Signature input module to report trouble back to the system.

Standard Features

- Up to 63 remote microphones per ASU
- Annunciator or cabinet mounting
- VU meter and status LEDs
- Active remote mic has priority with ASU priority override
- All wiring is supervised

Application

The 3-REMICA and 3-REMICP are designed to add remote paging capability at network nodes or remote annunciators that are remotely located from the Audio Source Unit. These areas are typically alternate fire command stations, security desks, or other areas where public messages are issued during an emergency. Selection of paging areas is done with standard EST3 Control Display Modules, which can be programmed as required for each paging application.

Remote Microphones

3-REMICA, 3-REMICP



3-REMICP



3-REMICA



U.S.
T 888-378-2329
F 866-503-3996

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Australia
T 61 3 9259 4700
F 61 3 9259 4799


Europe
T 32 2 725 11 20
F 32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com

© 2006 General Electric Company
All Rights Reserved

Typical Wiring

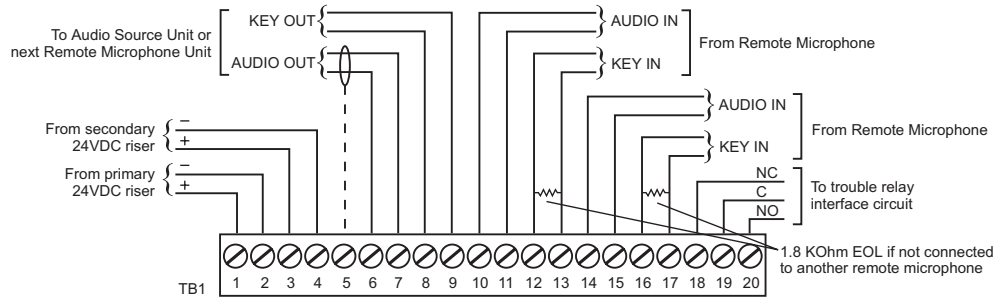

Engineering Specifications

Remote paging microphones shall be provided at the locations specified on the drawings. Each remote microphone shall provide a dynamic Push-to-Talk microphone, Page level meter, Local Page Active LED, Remote Page Active LED, and Trouble LED. Selection of paging areas shall be provided using Control Display Modules, which can be programmed as required for each paging application. The system shall support up to 63 remote microphones.

Technical Specifications

Installation		3-REMICA 3-REMICP	Takes up two spaces in the 3-ANN series of annunciator cabinets. Remote microphone in chassis for use in CAB series cabinets.
Input Power			18 - 30 Vdc @ 45 mA standby, 47 mA when paging
Microphone			Dynamic, PTT
Audio Output			1 VRMS into 1K Ohms
Audio Input			1 VRMS into 1K Ohms
Frequency Response			100 - 4,000 Hz
Supervision Audio Key (PTT)			1 KHz Tone Pulse DC for opens and shorts
Wiring			
	Maximum Resistance		210 ohms max. from output of last cascaded remote microphone to 3-ASU remote microphone input
	Wire Type		Audio = Twisted-shielded pair, 14 - 26 AWG Key (PTT) = Twisted pair, 14 - 26 AWG
Indicators			Page level meter, Local Page Active LED, Remote Page Active LED, Trouble LED
Agency Listings			UL, ULC
Operating Environment			32°F (0°C) to 120°F (49°C), 93% RH Non-condensing

Ordering Information

Catalog Number	Description	Ship Wt. lb (kg)
3-REMICA	Remote microphone for use in 3-ANN series annunciator cabinets	15 (6.8)
3-REMICP	Remote microphone in chassis for use in CAB series cabinets	15 (6.8)
3-CHASS4	Chassis, with space for a 3-REMICP or 3-ASU and four local rail modules, for use in CAB series cabinets	8.5 (3.9)