

## Overview

Genesis ceiling speaker-strobes are small, compact, and attractive audible-visible emergency signaling devices. Protruding no more than 1.6" (41 mm) from the ceiling, Genesis speaker-strobes blend with any decor.

Signals feature textured housings in architecturally neutral white or eye-catching fire alarm red. An ingenious iconographic symbol indicates the purpose of the device. This universal symbol is code-compliant and is easily recognized by all building occupants regardless of what language they speak. Models with "FIRE" markings are also available.

Thanks to patented breakthrough technology, GE Security Genesis strobes do not require bulky specular reflectors and lenses. Instead, an exclusive cavity design conditions light to produce a highly controlled distribution pattern. Significant development efforts employing this new technology have given rise to a new benchmark in strobe performance – FullLight technology.

FullLight strobe technology produces a smooth light distribution pattern without the spikes and voids characteristic of specular reflectors. This ensures the entire coverage area receives consistent illumination from the strobe flash.

Depending on the model, Genesis speaker-strobes feature 15 to 95, or 95 to 177 candela output (see ordering information), which is selectable with a conveniently-located switch. The candela output setting remains clearly visible even after final installation, yet it is locked in place to prevent unauthorized movement after installation.

## Standard Features

- **Field configurable – no need to remove the device!**
  - Select ¼, ½, 1, or 2 watt operation
  - 15/30/75/95 cd and 95/115/150/177 cd models available
  - Switch settings remain visible *even after the unit is installed*
- **Unique low-profile design**
  - 30 per cent slimmer profile than comparable signals
  - Attractive appearance
  - No visible mounting screws
  - Available with white or red housings
- **Unparalleled performance**
  - loud 90 dBA output ensures clear, crisp audio
  - Precision timing electronics meet tough synchronizing standards for strobes when used with compatible modules
  - Highly regulated in-rush current allows the maximum number of strobes on a circuit
  - 25 V<sub>RMS</sub> and 70 V<sub>RMS</sub> models available, all supplied with a DC blocking capacitor for audio circuit supervision
- **Easy to install**
  - Fits all standard 4" square electrical boxes with plenty of room behind the signal for extra wire – *no extension ring or trim plate needed*
  - #18 - #12 AWG terminals – ideal for long runs, existing wiring
- **Approved for public and private mode applications**
  - UL 1971-listed as signaling devices for the hearing impaired
  - UL 1638-listed as protective visual signaling appliances
  - UL 1480-listed as fire alarm speaker
  - UL/ULC listed for ceiling or wall use

# Field Configurable Ceiling Speaker-strobes

## Genesis Series



## Strobe Application

Genesis speaker-strobes include a DC blocking capacitor to allow electrical supervision of the audio distribution circuit. Models for 25 V<sub>RMS</sub> and 70 V<sub>RMS</sub> audio circuits are available. The mylar speaker with its sealed back construction is extra durable, is impervious to moisture, and provides improved audibility. ¼ W to 2 W operation is selectable with a conveniently-located switch on the front of the device. The wattage tap setting remains clearly visible even after final installation.

All Genesis speaker-strobes are fully compatible with Enhanced Integrity signals. The two product lines may be mixed on the same circuit.

Genesis speaker-strobes are UL 1971-listed for use indoors as wall or ceiling mounted public-mode notification appliances for the hearing impaired. Prevailing codes require strobes to be used where ambient noise conditions exceed 105 dBA (87dBA in Canada), where occupants use hearing protection, and in areas of public accommodation as defined in the *Americans with Disabilities Act*, which requires visible signals in the following areas:

- rest rooms, meeting rooms, and other common use areas.
- sleeping rooms intended for use by persons with hearing impairment (in accordance with Title 1 of ADA).
- work areas used by a person with a hearing impairment (per Title 1 of ADA).

Although all Genesis strobes are self-synchronizing, when installed with an optional synchronization module, strobe flashes from devices on the same circuit synchronize to within 10 milliseconds of each other *indefinitely*. This exceeds the two-hour minimum specified in the UL standards. Only one synchronization module is required per circuit.

Genesis speaker-strobes are synchronized and UL-listed for use in sleeping or non-sleeping areas. They are intended for indoor use only and are approved for wall or ceiling mount applications.

**Recommended Strobes:** The following guidelines are based on ANSI/NFPA 72 *National Fire Alarm Code* (2002). When applied and installed in accordance with that code, GE Security strobes meet or exceed the illumination produced by the ADA-specified 75 candela (cd) strobe at 50 feet. (ADA suggests using 75 cd strobes throughout an area, with spacing that never exceeds 50 ft. from the strobe to any point in the protected space.)

**WARNING:** These devices will not operate without electrical power. As fires frequently cause power interruptions, we suggest you discuss further safeguards with your local fire protection specialist. Research indicates that the intensity of strobe needed to awaken 90% of sleeping persons is approximately 100 cd. GE Security recommends that strobes in sleeping rooms be set to 110 cd minimum.

**Non-Sleeping Areas and Corridors:** GE Security strobes rated at less than 110 cd per UL 1971 are intended for use in non-sleeping areas only. Install with the bottom of the device at least 80 inches (2.0 m) and no more than 96 inches (2.4 m) above the finished floor. No point in any space (including corridors) required to have strobes should be more than 50 feet (15.2 m) from the signal (in the horizontal plane).

Room Type	Maximum Area (square room size)	Maximum Ceiling Height	Recommended Ceiling mount Genesis Strobe	
Non-sleeping Rooms (ceiling mounted)	20 x 20 ft. (6.1 x 6.1 m)	10 feet (3.05 m)	15 cd	
	30 x 30 ft. (9.1 x 9.1 m)		30 cd	
	40 x 40 ft. (12.2 x 12.2 m)		75 cd	
	50 x 50 ft. (15.2 x 15.2 m)		95 cd	
	20 x 20 ft. (6.1 x 6.1 m)	20 feet (6.10 m)	30 cd	
	30 x 30 ft. (9.1 x 9.1 m)		75 cd	
	40 x 40 ft. (12.2 x 12.2 m)		95 cd	
	50 x 50 ft. (15.2 x 15.2 m)		115 cd	
	20 x 20 ft. (6.1 x 6.1 m)		30 feet (9.14 m)	75 cd
	30 x 30 ft. (9.1 x 9.1 m)			75 cd
40 x 40 ft. (12.2 x 12.2 m)	115 cd			
50 x 50 ft. (15.2 x 15.2 m)	150 cd			

Note: Recommendations in the table above assume the strobe is placed in the center of the room. If not, the maximum room size is determined by doubling the distance from the strobe to the farthest wall.

**Sleeping areas:** In sleeping areas, ceiling mounted strobes (and wall mounted strobes installed less than 24 inches from the ceiling) must be rated at a minimum of 177 cd. Wall mounted strobes installed more than 24 inches (610 mm) from the ceiling must be rated at a minimum of 110 cd. In all cases, the distance from the strobe to the pillow must not exceed 16' (4.8 m).

For detailed spacing requirements, consult *The Handbook of Visible Notification Appliances for Fire Alarm Applications* published by GE Security Press, or contact your local GE Security representative.

## Speaker Application

The suggested sound pressure level for each signaling zone used with alert or alarm signals is a minimum of 15 dB above the average ambient sound level or 5 dB above the maximum sound level having a duration of at least 60 seconds, whichever is greater. This is measured 5 feet (1.5 m) above the floor. The average ambient sound level is the A-weighted sound pressure measured over a 24-hour period.

Doubling the distance from the signal to the ear will theoretically cause a 6 dB reduction in the received sound pressure level. The actual effect depends on the acoustic properties of materials in the space. Doubling the power output of a device (e.g.: a speaker from 1 W to 2 W) will increase the sound pressure level by 3 dBA. A 3 dBA difference represents a barely noticeable change in volume.

Combination audible/visual signals must be installed in accordance with guidelines established for strobes.

## Application Notes - Canada

(Based in part on 1995 Canada National Building Code)

The fire alarm signal sound pressure level shall not exceed 110 dBA in any normally occupied area. The sound pressure level from an audible signal in a floor area used for occupancies other than residential occupancies shall not be less than 10 dBA above ambient levels, and never less than 65 dBA. In sleeping rooms the sound pressure level from an audible signal shall not be less than 75 dBA when any intervening doors between the device and the sleeping room are closed.

The fire alarm audible signal shall be supplemented by fire alarm strobes in any floor area where the ambient noise level exceeds 87 dBA, or where the occupants of the floor area use ear protective devices, are located within an audiometric booth, or are located within sound insulating enclosures. This also applies to assembly occupancies in which music and other sounds associated with performances could exceed 100 dBA. Strobes shall be installed in a building so that the flash from one device is visible throughout the floor area or portion thereof in which they are installed.

## Current Draw

UL Nameplate Rating				
	15 cd	30 cd	75 cd	95 cd
	RMS	RMS	RMS	RMS
<b>16 Vdc</b>	109	151	281	318
<b>16 Vfwr</b>	131	194	379	437

Typical Current								
	15 cd		30 cd		75 cd		95 cd	
	RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
<b>16 Vdc</b>	94	87	140	135	273	268	325	323
<b>20 Vdc</b>	74	68	108	105	205	203	244	242
<b>24 Vdc</b>	63	59	90	88	168	166	194	192
<b>33 Vdc</b>	48	46	70	68	124	123	139	138
<b>16 Vfwr</b>	126	67	187	108	368	231	403	260
<b>20 Vfwr</b>	108	54	156	84	281	168	333	199
<b>24 Vfwr</b>	97	47	139	71	240	135	270	156
<b>33 Vfwr</b>	89	39	119	56	197	100	214	111


UL Nameplate Rating (high cd output models)			
95 cd	115 cd	150 cd	177 cd
RMS	RMS	RMS	RMS
330	392	502	565
432	518	643	693

Typical Current (high cd output models)							
95 cd		115 cd		150 cd		177 cd	
RMS	Mean	RMS	Mean	RMS	Mean	RMS	Mean
333	330	392	390	499	496	551	545
259	257	303	301	378	375	429	426
212	210	245	243	306	304	342	340
155	153	180	174	211	209	236	234
484	283	570	339	673	411	724	446
380	212	438	248	537	312	604	352
318	172	361	198	434	243	484	273
245	123	269	137	308	160	338	176


### Notes and Comments

1. Current values are shown in mA.
2. UL nameplate rating is higher than typical current due to measurement methods and instruments used.
3. GE Security recommends using the typical current for system design including NAC and Power Supply loading and voltage drop calculations.
4. Use the Vdc RMS current ratings for filtered power supply and battery AH calculations. Use the Vfwr RMS current ratings for unfiltered power supply calculations.
5. Fuses, circuit breakers and other overcurrent protection devices are typically rated for current in RMS values. Most of these devices operate based upon the heating affect of the current flowing through the device. The RMS current (not the mean current) determines the heating affect and therefore, the trip and hold threshold for those devices.
6. Our industry has used 'mean' currents over the years. However, UL will direct the industry to use the 2004 RMS values in the future.

## Light output - (effective cd)

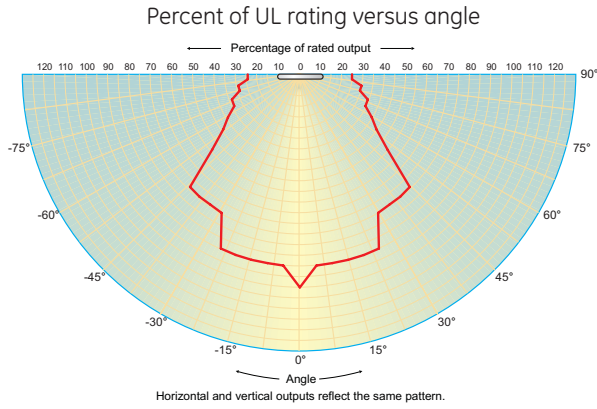


## Typical Sound Output (dBA)

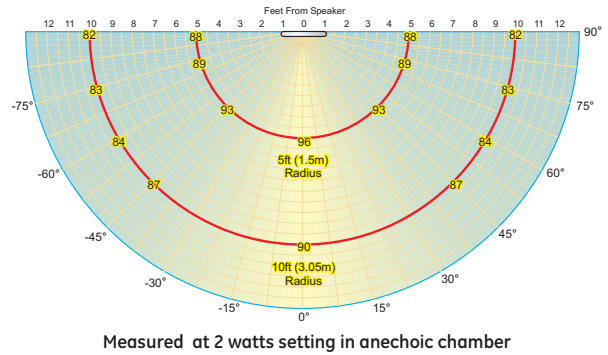


## Installation and Mounting

All models are intended for indoor ceiling or wall applications only. Speaker-strobes are mounted to a flush North-American 4" square electrical box, 2 1/8" (54 mm) deep.

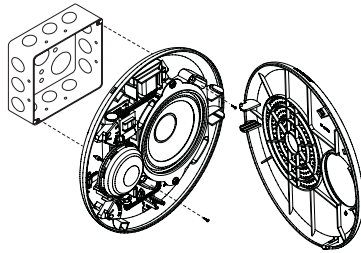

Genesis ceiling speaker-strobes simply unlatch and hinge down to open. This gains access to mounting screws and the selectable candela wattage tap switches. The shallow depth of Genesis devices leaves ample room behind the signal for extra wiring. Once installed with the cover in place, no mounting screws are visible.




### Caution:

When installed, these devices are not centered on the electrical box. Make sure boxes are mounted to compensate for this difference. Use the mounting template provided with installation sheet 3100614.

### Field Configuration

Genesis ceiling speaker-strobes may be set for 1/4, 1/2, 1, or 2 watt operation. Depending on the model, Genesis ceiling speaker-strobes may also be set for 15/30/75/95 or 96/115/150/177 candela output (see ordering information). Output settings are changed by simply opening the device and sliding the switches to the desired settings. The speaker-strobe does not have to be removed to change the output settings. The settings remain visible through small windows on the front of the device after the cover is closed.




## Sound Level Output

Wattage	25V	25V	70V	70V
	UL Rated*	Typical	UL Rated*	Typical
1/4 W	80 dBA	80.7 dBA	80 dBA	81.1 dBA
1/2 W	84 dBA	83.7 dBA	84 dBA	83.5 dBA
1 W	87 dBA	87.1 dBA	87 dBA	87.2 dBA
2 W	90 dBA	90.1 dBA	91 dBA	90.2 dBA


\*Sound level output notes: dBA = Decibels, A-weighted. **UL1480:** Sound level output at 10 ft (3.05 m) measured in a reverberant room using 400 to 4,000 Hz band limited pink noise. **ULC-S541:** Meets or exceeds 85 dBA in an anechoic chamber at 10 ft (3.05 m). **Directional characteristics:** Within 6 dB of on-axis sound level when measured 90° off-axis (horizontal).

## Dimensions

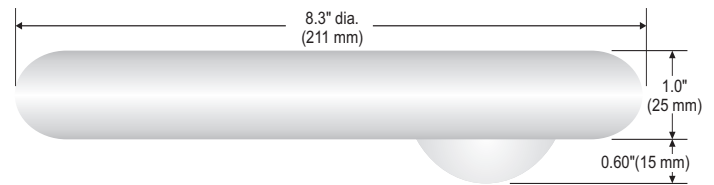

## Wiring

Field wiring terminals accommodate #18 to #12 AWG (0.75 mm<sup>2</sup> to 2.5 mm<sup>2</sup>) wiring.

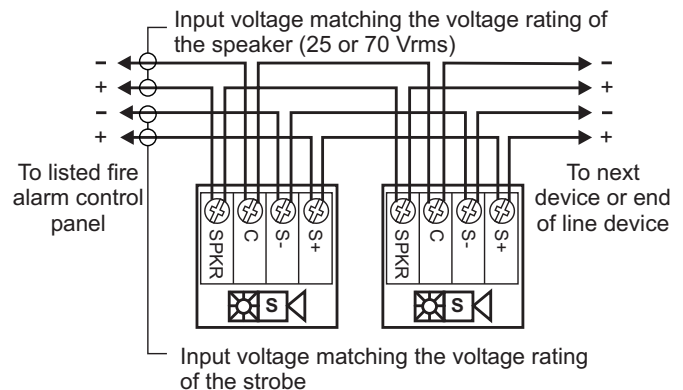

## Specifications

Housing	Textured UV stabilized, color impregnated engineered plastic. Exceeds 94V-0 UL flammability rating. Red and white models available.
Mounting	Flush mount to North American 4-inch square electrical box, 2-1/8 (54 mm) inches deep, or 960A-4RF round flush box. No extension ring required. Suitable for indoor wall or ceiling applications.
Wire connections	Screw terminals: polarized inputs for speaker, #18 to #12 AWG (0.75 mm <sup>2</sup> to 2.5 mm <sup>2</sup> ) wire size
Operating environment	Indoor: 32-120° F (0-49° C) ambient temperature; 0-93% relative humidity.
Agency listings/approvals	Meets ULC-S541, year 2004 UL requirements for standards UL1638 and UL1971, CSFM, and complies with UL1480 Fifth Edition. All speaker-strobes comply with ADA Code of Federal Regulation Chapter 28 Part 36 Final Rule. FM and MEA pending.
Speaker	
Input/Operating Volts	25 Vrms (Model GC-S2VM) or 70 Vrms (Model GC-S7VM).
Speaker Cone	Speaker frequency response: 250 - 13,000 Hz. Optimized for voice intelligibility. 4-inch (102mm) mylar cone, sealed back construction, rated for 8 watts, 8 ohm voice coil.
Strobe	
Strobe output rating	UL 1971, UL 1638, ULC S526: selectable 15/30/75/95 cd (VM models) and 95/115/150/177 cd (VMH models)
Strobe operating voltage	GC-S2VM/-S7VM series speaker-strobes: non-coded, filtered 16-33 Vdc or unfiltered 16-33 Vdc FWR
Strobe flash rate	GC-S2VM/-S7VM series speaker-strobes: one flash per second synchronized with optional G1M Genesis Signal Master indefinitely within 10 milliseconds (or self-synchronized within 200 milliseconds over thirty minutes on a common circuit without G1M Genesis Signal Master) Temporal setting (private mode only): synchronized to temporal output of Genesis audible signals on same circuit
Synchronization	Meets or exceeds UL 1971 requirements. Maximum allowed resistance between any two devices is 20 Ohms. Refer to specifications for the synchronization control module, this strobe, and the control panel to determine allowed wire resistance.
Compatible synchronization modules	G1M-RM, SIGA-CC1S, SIGA-MCC1S
Lens	Optical grade polycarbonate (clear)

## Ordering Information

All speaker-strobes include field-selectable ¼, ½, 1, or 2 watt taps

Catalog Number	Housing Color	Marking	Description	Ship Wt. lbs (kg)
GC- S2VM	White	None	25 Volt Speaker-strobe with selectable 15, 30, 75, or 95 cd output	2.25 (1.0)
GCF- S2VM	White	"Fire"		
GCFR- S2VM	Red	"Fire"		
GC- S2VMH	White	None	25 Volt Speaker-strobe with selectable 95, 115, 150, or 177 cd output	2.25 (1.0)
GCF- S2VMH	White	"Fire"		
GCFR- S2VMH	Red	"Fire"		
GC- S7VM	White	None	70 Volt Speaker-strobe with selectable 15, 30, 75, or 95 cd output	2.25 (1.0)
GCF- S7VM	White	"Fire"		
GCFR- S7VM	Red	"Fire"		
GC- S7VMH	White	None	70 Volt Speaker-strobe with selectable 95, 115, 150, or 177 cd output	2.25 (1.0)
GCF- S7VMH	White	"Fire"		
GCFR- S7VMH	Red	"Fire"		



White Field configurable Speaker-Strobes may be ordered with or without 'FIRE' marking. Red Speaker-Strobes come with "FIRE" marking.

Accessories		
G1M-RM	Genesis Signal Master Module (1-gang)	0.2 (0.1)
SIGA-CC1S	Intelligent Synchronization Output Module (2-gang)	0.5 (0.23)
SIGA-MCC1S	Intelligent Synchronization Output Module (Plug-in UIO)	0.18 (0.08)

GE Security recommends that these fire alarm speaker-strobes always be installed in accordance with the latest recognized edition of national and local fire alarm codes.

# GE Security

U.S.  
T 888-378-2329  
F 866-503-3996

Canada  
T 519 376 2430  
F 519 376 7258

Asia  
T 852 2907 8108  
F 852 2142 5063

Australia  
T 61 3 9259 4700  
F 61 3 9259 4799

Europe  
T 32 2 725 11 20  
F 32 2 721 86 13

Latin America  
T 305 593 4301  
F 305 593 4300

[www.gesecurity.com](http://www.gesecurity.com)

© 2006 General Electric Company  
All Rights Reserved

*Genesis Series* is a Trademark  
of GE Security.



imagination at work